

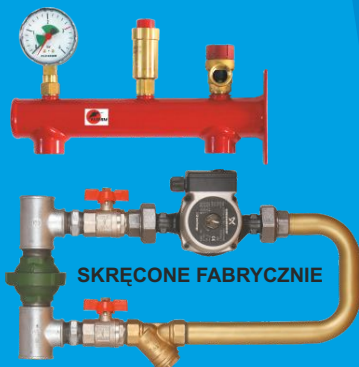


## SPRZĘGŁO HYDRAULICZNE SHE ELTERM

PROPONUJEMY  
RÓWNIEŻ:

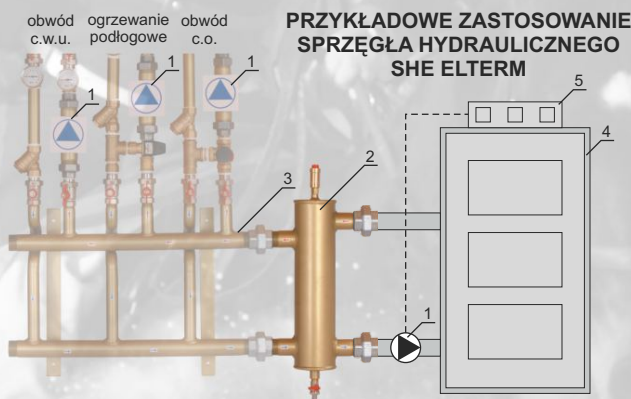

	SHE40 25/65	SHE70 32/80	SHE100 40/100	SHE115 50/100	SHE 50/125	SHE225 65/150	SHE420 80/200
Nr katlog.	SHE40	SHE70	SHE100	SHE115	SHE156	SHE225	SHE420
Max. przepływ	2,3 m <sup>3</sup> /h	4,0 m <sup>3</sup> /h	5,7 m <sup>3</sup> /h	6,6 m <sup>3</sup> /h	9,0 m <sup>3</sup> /h	12,9 m <sup>3</sup> /h	24 m <sup>3</sup> /h
Max moc przy ΔT=15K	do 40kW	do 70kW	do 100kW	do 115kW	do 156kW	do 225kW	do 420kW
4 x przyłącza	mufa 1"	mufa GW 5/4"	Gz 1 1/2"	Gz 2"	Gz 2"	kołnierz 2 1/2"	kołnierz Gz 3"
Temp. max.	110°C	110°C	110°C	110°C	110°C	110°C	110°C
Ciśn. nomin.	3 bary	3 bary	3 bary	3 bary	3 bary	3 bary	3 bary
H <sub>1</sub>	290 mm	340 mm	340 mm	400 mm	400 mm	565 mm	680 mm
H <sub>2</sub>	255 mm	300 mm	300 mm	350 mm	350 mm	500 mm	600 mm
H <sub>3</sub>	410 mm	470 mm	470 mm	545 mm	545 mm	735 mm	875 mm
H <sub>4</sub>	65 mm	65 mm	65 mm	75 mm	75 mm	90 mm	105 mm
H <sub>c</sub>	590 mm	650 mm	650 mm	725 mm	725 mm	915 mm	1055 mm
D <sub>2</sub>	Ø 75 mm	Ø 90 mm	Ø 114 mm	Ø 114 mm	Ø 133 mm	Ø 159 mm	Ø 219 mm
Poj. V	1,0 l	1,6 l	2,7 l	3,2 l	4,5 l	8,9 l	19,7 l
p x V ( bar x l )	3	4,8	8,1	9,6	13,5	26,7	59,1
Odpowietrznik + zawór spust.	w kpl.	w kpl.	w kpl.	w kpl.	w kpl.	w kpl.	w kpl.

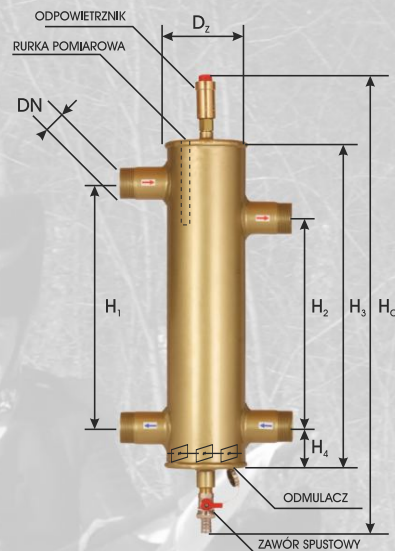

## SPRZĘGŁA HYDRAULICZNE SHE



25/65  
do 40kW



32/80  
do 70kW



40/100  
do 100kW



50/100  
do 115kW



50/125  
do 156kW



65/150  
do 225kW



80/200  
do 420kW